



iQ Granit - 3040 424




3040 422  
3221 422  
3243 422



3040 782  
3243 782



3040 382  
3221 382  
3243 382



3040 383  
3221 383  
3243 383



3040 435  
3243 435



3040 433  
3243 433



3040 770  
3221 770  
3243 770



3040 421  
3221 421  
3243 421




3040 434  
3221 434



3040 419  
3243 419



3040 428  
3243 428



3040 372  
3221 372  
3243 372



3040 772  
3221 772  
3243 772



3040 423  
3243 423



3040 375  
3221 375  
3243 375


TECHNICAL DATA	STANDARDS	iQ Granit	iQ Granit Acoustic
<b>Classification</b>			
<b>Classification</b>	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 33 42
<b>Type of floorcovering</b>	EN 651 (FDIS ISO 11638)	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
<b>UPEEC Classification</b>		U4 P3 E2/3 C2	
	Impact sound reduction EN ISO 717/2	—	Approx. +15dB
	Acoustic improvement NF S31-074	—	L <sub>n,e,w</sub> <65dB Class A
	NF UPEEC. certificate (NF 189)	312-005.1	312-022.1
<b>Characteristics</b>			
<b>Total thickness</b>	ISO 24346 (EN 428)	2.00mm	4.00mm
<b>Wear layer thickness</b>	ISO 24340 (EN430)	2 950g/m <sup>2</sup>	3 810g/m <sup>2</sup>
<b>iQ PUR</b>	-	Yes	
<b>Abrasion group</b>	EN 660-2	Group T: ≤ 2mm <sup>3</sup>	
<b>Technical performances</b>			
<b>Residual indentation</b>	Average measured value	0.02mm	0.12mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
<b>Reaction to fire</b>	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m <sup>2</sup> B <sub>s</sub> s1 Pass	
<b>Dimensional stability</b>	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0.40%
<b>Castor wheel test</b>	ISO 4918 (EN 425)	Suitable	
<b>Marine equipment</b>	IMO FTPC Part 5 and 2 IMO Res. A653	0575 *	—
<b>Static electric charge</b>	EN 1815	< 2kV	
<b>Light fastness</b>	EN ISO 105-B02	≥ 6	
<b>Chemical resistance</b>	ISO 26987 (EN 423)	Good resistance	
<b>Fungi and bacteria resistance</b>	ISO 846: Part C	Does not favour growth	
<b>Clean room test</b>	ASTM F51/00 ISO 14644-1	Class A Class 4	— —
<b>Slip resistance</b>	DIN 51130 DIN 13893	R9 ≥ 0.3	
<b>Thermal resistance Underfloor heating</b>	EN 12667 / DIN 52612	Approx. 0.01m <sup>2</sup> K/W Suitable - max. 27°C	0.035m <sup>2</sup> K/W Suitable - max. 27°C

\*Colours 783 and 784 are not approved for use under the IMO directive.

The above information is subject to modifications for the benefit of further improvement (01/2014).  
For more detailed technical information, please contact Tarkett.



3040 424  
3243 424



3040 420  
3243 420



3040 425  
3243 425

## Main Product Features

- Timeless design in fresh colours
- 70 million m<sup>2</sup> installed worldwide
- Wear class T
- iQ Granit Acoustic 15dB available
- Coordinated with: conductive iQ Toro SX and dissipative iQ Granit SD, as well as slip-resistant Granit Safe.T

## Surface Treatment



## Sustainability Tag


### iQ Granit




### iQ Granit Acoustic





## Logistics Information



## Available in tiles



## General Information

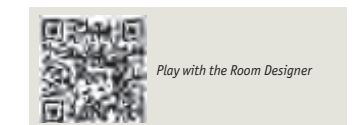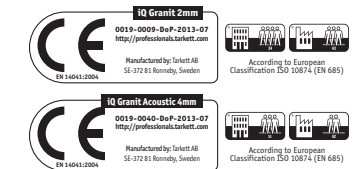



iQ Granit - 3040 432



3040 432  
3221 432  
3243 432



3040 436  
3243 436




3040 777  
3221 777  
3243 777



3040 379  
3243 379



3040 427  
3243 427



3040 384  
3243 384



3040 779  
3243 779



3040 426  
3221 426  
3243 426



3040 437  
3243 437



3040 780  
3221 780  
3243 780

TECHNICAL DATA	STANDARDS	iQ Granit	iQ Granit Acoustic
<b>Classification</b>			
<b>Classification</b>	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 33 42
<b>Type of floorcovering</b>	EN 651 (FDIS ISO 11638)	Homogeneous vinyl flooring	Homogeneous vinyl flooring with foam interlayer
<b>UPEC Classification</b>			
	UPEC Classification	U4 P3 E2/3 C2	
	Impact sound reduction EN ISO 717/2	—	Approx. +15dB
	Acoustic improvement NF S31-074	—	L <sub>n,e,w</sub> <65dB Class A
	NF UPEC, certificate (NF 189)	312-005.1	312-022.1
<b>Characteristics</b>			
<b>Total thickness</b>	ISO 24346 (EN 428)	2.00mm	4.00mm
<b>Wear layer thickness</b>	ISO 24340 (EN430)	2 950g/m <sup>2</sup>	3 810g/m <sup>2</sup>
<b>iQ PUR</b>	-	Yes	
<b>Abrasion group</b>	EN 660-2	Group T: ≤ 2mm <sup>3</sup>	
<b>Technical performances</b>			
<b>Residual indentation</b>	Average measured value	0.02mm	0.12mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
<b>Reaction to fire</b>	EN ISO 9239-1 EN ISO 13501-1 EN ISO 11925-2	≥ 8 kW/m <sup>2</sup> B <sub>s</sub> s1 Pass	
<b>Dimensional stability</b>	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles	≤ 0.40%
<b>Castor wheel test</b>	ISO 4918 (EN 425)	Suitable	
<b>Marine equipment</b>	IMO FTPC Part 5 and 2 IMO Res. A653	0575 *	—
<b>Static electric charge</b>	EN 1815	< 2kV	
<b>Light fastness</b>	EN ISO 105-B02	≥ 6	
<b>Chemical resistance</b>	ISO 26987 (EN 423)	Good resistance	
<b>Fungi and bacteria resistance</b>	ISO 846: Part C	Does not favour growth	
<b>Clean room test</b>	ASTM F51/00	Class A	—
	ISO 14644-1	Class 4	—
<b>Slip resistance</b>	DIN 51130 EN 13893	R9 ≥ 0.3	
<b>Thermal resistance Underfloor heating</b>	EN 12667 / DIN 52612	Approx. 0.01m <sup>2</sup> K/W Suitable - max. 27°C	0.035m <sup>2</sup> K/W Suitable - max. 27°C

\*Colours 783 and 784 are not approved for use under the IMO directive.


The above information is subject to modifications for the benefit of further improvement (01/2014).  
For more detailed technical information, please contact Tarkett.



3040 429  
3243 429



3218 430  
3044 430



3218 431  
3044 431

## Main Product Features

- Timeless design in fresh colours
- 70 million m<sup>2</sup> installed worldwide
- Wear class T
- iQ Granit Acoustic 15dB available
- Coordinated with: conductive iQ Toro SX and dissipative iQ Granit SD, as well as slip-resistant Granit Safe.T

## Surface Treatment



## Sustainability Tag


### iQ Granit




### iQ Granit Acoustic



## Logistics Information



## Available in tiles



## General Information

